




A.filter Duplex filterunit 600-50/40

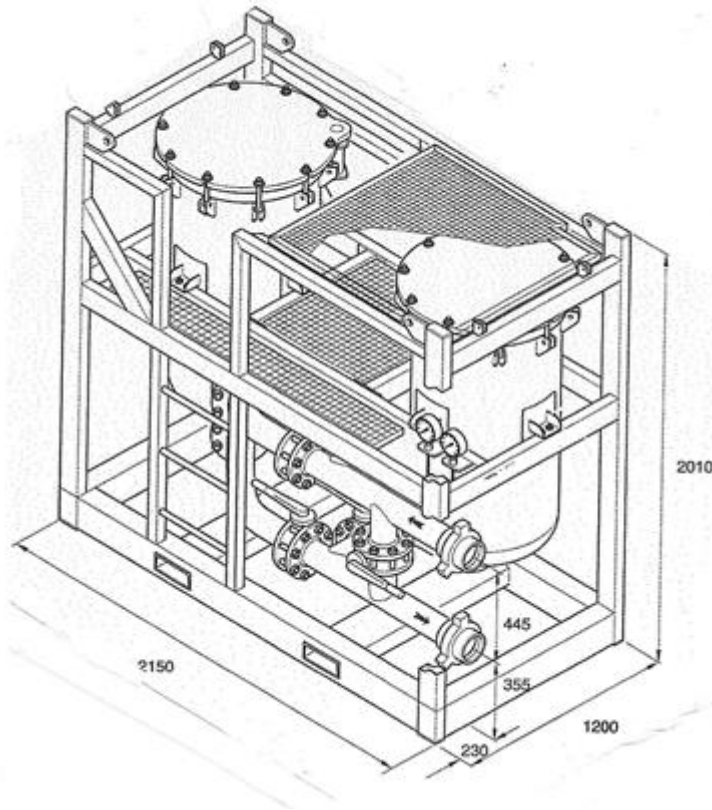

Improvements

- Stronger frame
- Bolts and nuts in SS316
- Build in ladder
- SS316 WECO couplings
- Bypass Valve

Optional extras

- Working pressure up to 16 bar
- Stainless Steel frame
- DNV Approved frame

System Design Features

- Standard series/ parallel configuration
- Standard 50 cartridges or 4 bags/ vessel
- Compact space saving design
- Innovative easy opening push lever and swing away vessel lid
- Swing-bolts and nuts for quick opening
- Self-sealing service friendly cover gasket
- All 4 inch WECO valves easy to operate from the front
- Crane and forklift supports for easy handling
- Safety valve set @ 7 bar
- Robust Offshore Frame
- Certified hoisting slings
- Storage racks for all baskets and bag top plates